

Light is OSRAM

OSRAM

BackLED M Core Product G5

24 V Backlighting modules


SPECIFICATION DATASHEET

Product Description

BackLED M CP G5 family delivers the best performance and optical effect for reliable outdoor advertising light box and channel letter designs.



Benefits

Upgraded flux output up to 83 lm.
Uniform light pattern design for 60-200 mm light-box depth.
Back-side injection technology for optimal protection.

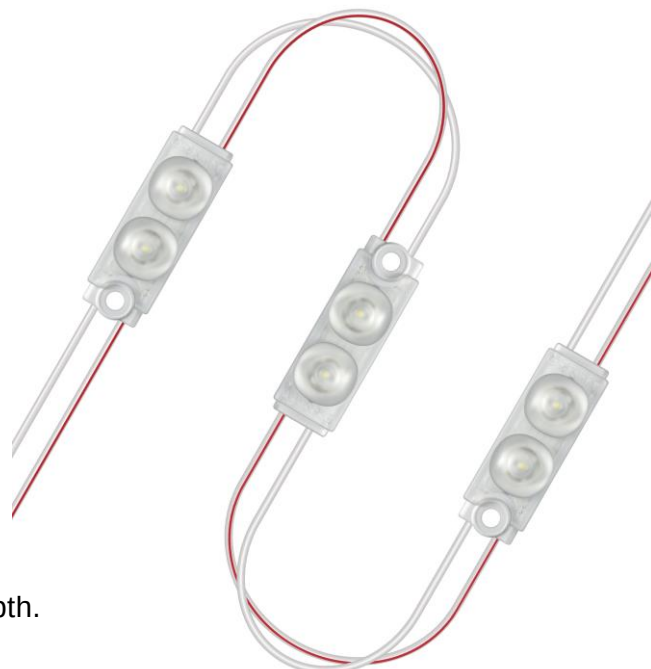

Applications

Signage boxes, channel letters, luminous areas and ceilings.



Approvals



When not printed on product label, they are under evaluation.

Product Features

- LED chain comprising 40 LED modules connected by flexible cables
- Each LED module contains 2 LEDs
- LED module pitch variable between 60 ~ 200 mm
- Compatible with OSRAM OPTOTRONIC constant voltage drivers / dimmers
- Color consistency of 3 SDCM
- Patented Square Lens technology
- Wide CCT and color options available
- IP66 rating
- Lifetime L70B50 50,000 h @ Tc 70°C
- 5 years warranty

TECHNICAL INFORMATION DATA FOR ENTIRE CHAIN

Product Name	Order Code [EAN10]	Color	CCT [K]	Voltage [V DC]	Power [W]	Lum. Flux [lm]	Modules per chain
BA-M-CP-810-24-G5	4052899627734	Ultra-Cool White	10000	24	24	3067	40
BA-M-CP-880-24-G5	4052899627741	Cool White	8000	24	24	3067	40
BA-M-CP-871-24-G5	4052899627758	Cool White	7100	24	24	3067	40
BA-M-CP-865-24-G5	4052899627765	Cool White	6500	24	24	3333	40
BA-M-CP-840-24-G5	4052899627772	Neutral White	4000	24	24	3200	40
BA-M-CP-830-24-G5	4052899627789	Warm White	3000	24	24	3200	40
BA-M-CP-810-24-G5-HF	4052899627888	Ultra-Cool White	10000	24	24	3067	40
BA-M-CP-880-24-G5-HF	4052899627895	Cool White	8000	24	24	3067	40
BA-M-CP-871-24-G5-HF	4052899627901	Cool White	7100	24	24	3067	40
BA-M-CP-865-24-G5-HF	4052899627918	Cool White	6500	24	24	3333	40
BA-M-CP-840-24-G5-HF	4052899627925	Neutral White	4000	24	24	3200	40
BA-M-CP-830-24-G5-HF	4052899627932	Warm White	3000	24	24	3200	40

TECHNICAL OPERATING DATA FOR SINGLE MODULE

Product Name	CCT [K]	CRI	Power [W]	Flux Output [lm]	Efficacy [lm/W]	Beam Angle [° FWHM]
BA-M-CP-810-24-G5	10000	>80	0.6	77	128	155
BA-M-CP-880-24-G5	8000	>80	0.6	77	128	155
BA-M-CP-871-24-G5	7100	>80	0.6	77	128	155
BA-M-CP-865-24-G5	6500	>80	0.6	83	138	155
BA-M-CP-840-24-G5	4000	>80	0.6	80	133	155
BA-M-CP-830-24-G5	3000	>80	0.6	80	133	155
BA-M-CP-810-24-G5-HF	10000	>80	0.6	77	128	155
BA-M-CP-880-24-G5-HF	8000	>80	0.6	77	128	155
BA-M-CP-871-24-G5-HF	7100	>80	0.6	77	128	155
BA-M-CP-865-24-G5-HF	6500	>80	0.6	83	138	155
BA-M-CP-840-24-G5-HF	4000	>80	0.6	80	133	155
BA-M-CP-830-24-G5-HF	3000	>80	0.6	80	133	155

GENERAL

Dimmable	Yes 1%...100%, via Pulse Width Modulation (PWM)
Binning	Single bin fine white, 3 SDCM
Lifetime	up to 50,000 h (L70B50, @ Tc max)
Warranty	5 years ¹⁾
Ingress protection	IP66 ²⁾
Adhesive tape on backside	3M
Complementary systems	BackLED Mounting Profile, OPTOTRONIC CV drivers and dimmers, OSRAM LMS
Certifications	CE, ENEC, UL, BIS ³⁾

¹⁾: Five-year warranty is provided only when the module is installed with proper screws or other suggested installation methods (e.g. mounting profile) on back plane.

²⁾: The LED modules must not be operated in places which are directly exposed to atmospheric conditions. For outdoor applications, hence the LED module must be protected by appropriate sealed enclosures or covers. Operation in or under water is prohibited.


³⁾: When not printed on product label, they are under evaluation

OPERATING CONDITIONS


	BA-M-CP-8xx-24-G5	BA-M-CP-8xx-24-G5-HF
Operating temperature Tc-Max (measured at Tc-Point) [°C]	-25...+70	-25...+70
Storage temperature [°C]	-25...+85	-25...+85
Voltage range [V DC]	23.4...24.9	23.4...24.9

- Exceeding maximum ratings for operating and storage temperature will reduce the expected lifetime or destroy the LED modules.
- Exceeding maximum ratings for operating voltage will cause hazardous overload and will likely destroy the LED modules.
- The temperature of the LED modules must be measured at the Tc-point according to EN60598-1 in a thermally constant status with a temperature sensor or a temperature sensitive label. For exact location of the Tc-point see product user instruction.

MECHANICAL DRAWINGS AND DIMENSIONS

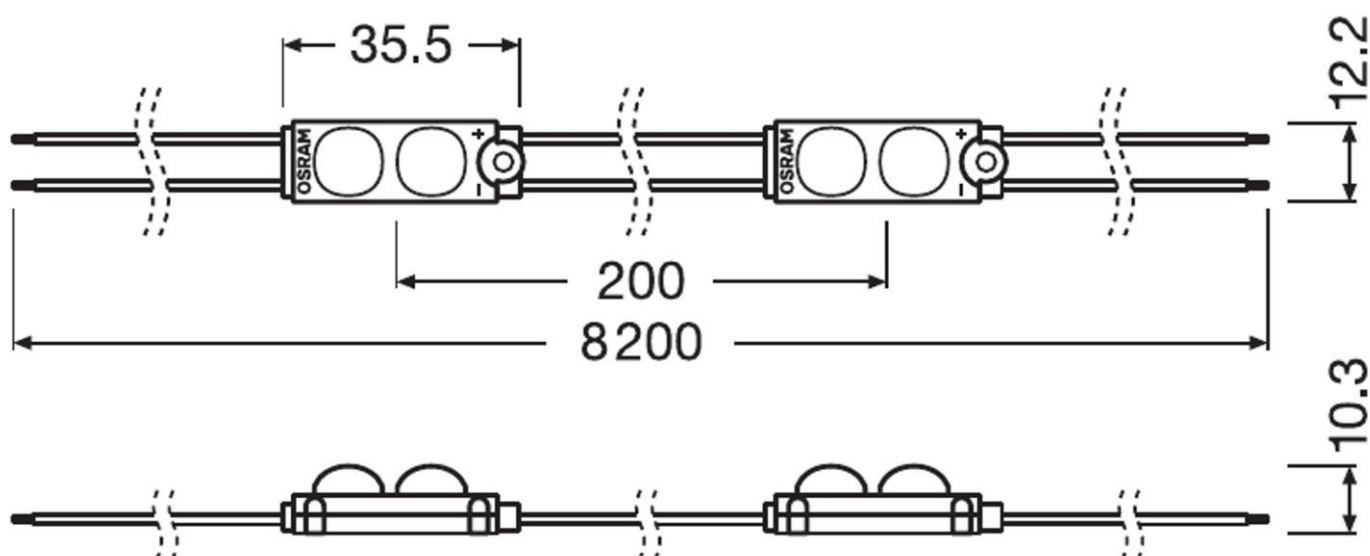

LIGHT DISTRIBUTION

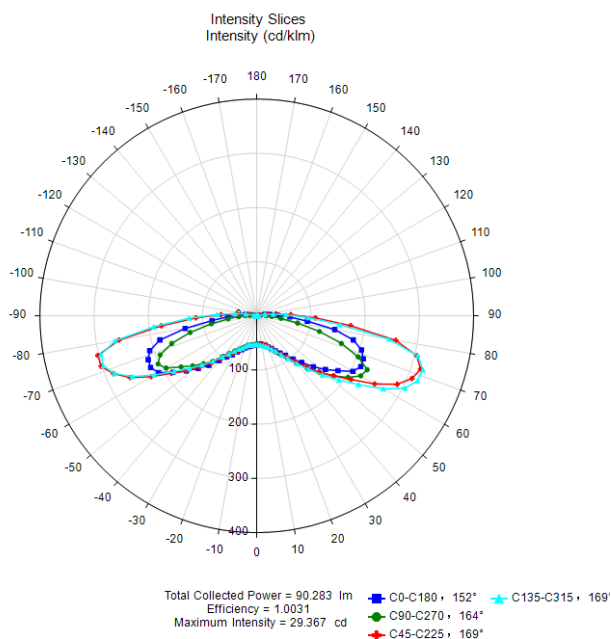

155° (±10%)
Square-Ray Lens®

LAYOUT GUIDELINE

Product Name	Box depth [mm]	Module pitch [mm] with translucency material of:			Module / m ² with translucency material of:		
		35%	50%	35%	35%	50%	35%
BA-M-CP-8xx-24-G5	80	TBA	TBA	TBA	TBA	TBA	TBA
	100	TBA	TBA	TBA	TBA	TBA	TBA
	150	TBA	TBA	TBA	TBA	TBA	TBA
BA-M-CP-8xx-24-G5-HF	80	TBA	TBA	TBA	TBA	TBA	TBA
	100	TBA	TBA	TBA	TBA	TBA	TBA
	150	TBA	TBA	TBA	TBA	TBA	TBA

Suggestions based on high luminance requirement ($\approx 600 \text{ cd/m}^2$).

This guideline is only an approximation. The actual luminance and uniformity results can deviate due to many different application parameters, e.g. including but not limited to reflection of box inner surface, overall box/letter dimensions, optical parameters of the light emitting surface, ... etc.

OSRAM suggests testing the module performance in your eventual project design to make sure of brightness, uniformity and final colour appearance.

OSRAM professional team is available for final layouting suggestions. Check <https://www.osram.com/ds/tools/LEDdeSIGNer.jsp> free online layouting tool or contact OSRAM signage support team or your sales representative. LEDdeSIGNer online tool is constantly updated but recently launched modules may not be immediately available.

ACCESSORIES



This product is compatible with following accessories

Description	Product Name	EAN10	EAN40
Click&Play mounting profile	BA-MP-SM-G5-2M	4052899629196	4052899629219 (50pcs)
Click&Play cable clip	BA-CLIP-SM-G5	4052899629349 (50pcs)	4052899629356

SAFETY INFORMATION

- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- To avoid mechanical damage, the LED modules should be attached securely to the intended substrate. Heavy vibration should be avoided.
- Once modules are glued by means of their tapes on the application surface, modules must not be removed and re-located. This would lead to mechanical stress and IP rate may not be granted as well as lifetime.

The LED module incorporates no protection against short circuits, overload or overheating.

In order to drive OSRAM LED-Modules safely, it is absolutely necessary to operate them with an electronically stabilized power supply protecting against short circuits, overload and overheating.

OSRAM OPTOTRONIC® electronic control gear complies to all relevant standards and guarantees safe operation.

For dimming applications attention should be paid to specific references in "OPTOTRONIC® Technical Guide".

To also ease the luminaire/installation approval, electronic control gear for LED or LED modules must carry the CE mark.

In Europe LED modules declaration of conformity must include the following standards:

CE: IEC/TR 62778, IEC/EN 61347-1, IEC/EN 60529, IEC/EN 62031, IEC/EN 60598-1, IEC/EN 61347-1, IEC/EN 61547, IEC/TR 62778.

Please see the relevant application guides for more detailed information.

- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards.
- Observe correct polarity! Incorrect polarity will lead to no light emission and may cause damage of the LED module.

- Parallel connection is highly recommended as safe electrical operation mode. Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the LED module.
- Electrical contact is achieved with the contact cables.
- Cutting within the chain is only allowed between the wiring of the modules.
- Pay attention to ESD steps when mounting the module.
- When using power supplies other than OSRAM OPTOTRONIC®, in order to ensure continuous safe operation, the input voltage at modules has to be 23.4...24.9 V.
- LED modules are dimmable by means of PWM (pulse width modulation). It is recommended using OPTOTRONIC® 24 V dimmable drivers or following OSRAM constant voltage dimmers: OPTOTRONIC® OT DIM, OTi DALI DIM 1-4CH D, OT BLE DIM.
- The LED modules must not be operated in places which are directly exposed to atmospheric conditions. For outdoor applications, hence the LED modules have to be protected by appropriate sealed enclosures or covers. Operation in or under water is prohibited.
- Each LED module is equipped with a pre-mounted double-sided adhesive tape which allows optional or additional mounting aid. Due to varying properties of adherents and multiple external influences during the operation of the modules, OSRAM assumes no liability and provides no guarantee for a permanent adherence of the modules to the surface. OSRAM recommends fixation of the modules by means of suitable screws or compatible OSRAM mounting profile.
- To ensure uniform illumination, a reflective matt white surface is generally recommended for all internal frame walls and back panels of light boxes.
- This product is considered to be a "containing product" in the sense of Regulations (EU) 2019/2020 and (EU) 2019/2015.
- Tolerances of the reported values, are according to LED Modules Performance standard IEC/EN 62717
- In general, the replacement of the contained light sources without permanent damage to the product with the use of common available tools is possible in the final application when they can be dismantled from the installation environment and substituted for the necessary number of light sources restoring its full electrical/mechanical/thermal/optical functionality by means of a professional installer.
- Dismantling of light sources from containing products at end of life: Containing products with light sources which are scalable in length can be cut to the length of the contained light source and if applicable mechanically detached from protective and/or optical covers. Containing products shall be separated from building material and/or from other additional mounting accessories by means of a professional installer. Separate control gear and light sources must be disposed of at certified disposal companies in accordance with Directive 2012/19/EU (WEEE) in the EU and with Waste Electrical and Electronic Equipment (WEEE) Regulations 2013 in the UK. For this purpose, collection points for recycling centres and take-back systems (CRSO) are available from retailers or private disposal companies, which accept separate control gear and light sources free of charge. In this way, raw materials are conserved and materials are recycled.

ORDERING CODES

Description	EAN10*	EAN40	S-UNIT** (pcs)
BA-M-CP-810-24-G5	4052899627734	4052899628618	30
BA-M-CP-880-24-G5	4052899627741	4052899628625	30
BA-M-CP-871-24-G5	4052899627758	4052899628632	30
BA-M-CP-865-24-G5	4052899627765	4052899628649	30
BA-M-CP-840-24-G5	4052899627772	4052899628656	30
BA-M-CP-830-24-G5	4052899627789	4052899628663	30
BA-M-CP-810-24-G5-HF	4052899627888	4052899628762	30
BA-M-CP-880-24-G5-HF	4052899627895	4052899628779	30

BA-M-CP-871-24-G5-HF	4052899627901	4052899628786	30
BA-M-CP-865-24-G5-HF	4052899627918	4052899628793	30
BA-M-CP-840-24-G5-HF	4052899627925	4052899628809	30
BA-M-CP-830-24-G5-HF	4052899627932	4052899628816	30

* EAN 10: Ordering number per single sale unit bag

** S-Unit: Chain (EAN10) number per shipping unit (EAN40)

SALES AND TECHNICAL SUPPORT

www.osram.com

www.osram.com/backlighting

www.osram.com/led-designer

OSRAM GmbH

Head Office:

Marcel-Breuer-Strasse 6
80807 Munich, Germany

+49 89 6213-0
www.osram.com

OSRAM